


PRELIMINARY NOT FOR CONSTRUCTION

- REMOVE EXISTING ROOF AND RAFTERS
- REMOVE EXISTING DOOR AND INSTALL NEW 36X36 DOUBLE SLIDING WINDOW
- INSTALL 2X8 RAFTERS AT 16" ON CENTER FROM EXISTING PEAK TO THE TOP PLATE ON THE EXTERIOR WALL. SECURE IN PLACE WITH SIMPSON H2.5A HURRICANE CLIPS
- INSTALL ICE AND WATER SHIELD ON THE FIRST THREE FEET OF THE NEW ROOF AND 2 FEET AS FLASHING UP AND ALONG THE EXISTING WALL
- INSTALL SHINGLES OVER TAR PAPER OVER 3/4" THICK OSB SHEATHING. SHEATHING ATTACHED TO RAFTERS WITH 16D NAILS 4" ON CENTER
- INSTALL 1/2" OSB SHEATHING ON HOUSE WALL AND SIDING BELOW THE NEW WINDOW.

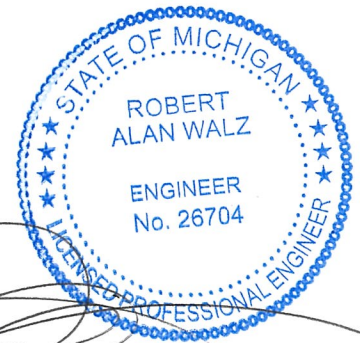

8-8-2022

JR ARCHITECTURAL DESIGN SERVICES, LLC. 16766 GREENLAWN ST DETROIT, MI 48221 (410)-302-8414
AUTHOR CLAIMS ALL COPYRIGHT PROTECTIONS
PROJECT: 1556 BAGLEY ROOF 1556 BAGLEY ST. DETROIT, MI 48216
DESIGNER JR ARCHITECTURAL DESIGN SERVICES, LLC. 16766 Greenlawn St. Detroit, MI 48221 (410)-302-8414
ARCHITECT OF RECORD
CONTRACTOR
LICENSE:
NOTES:
DRAWING TITLE:
DRAWN:
CHECKED:
SHEET No.

A3

NORTHWEST ELEVATION
SCALE: 1/2" = 1'-0"

